


Technical Support ***IS77 Honda/Acura with Amplified Antenna***

R.C.

Please refer to the following suggestions in the event you're adding an IS77 to a Honda/Acura that uses an amplified antenna:

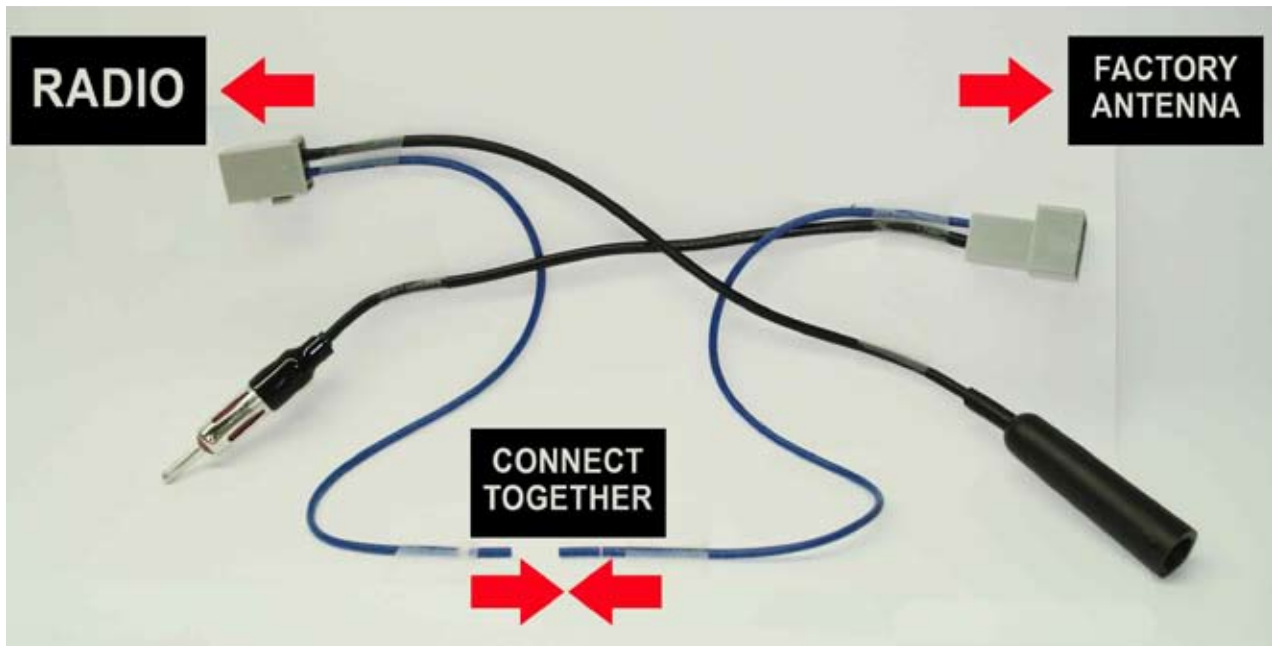

STEP 1

Plug the male antenna adapter (Best Kits BAA29 or other manufacturer's equivalent) into the radio and attach the female end of the adapter to the male antenna end from the IS77.

STEP 2

Plug the antenna that was removed from the radio into the female antenna adapter (Best Kits BAA28 or other manufacturer's equivalent) and attach the male end of the adapter into the female antenna end from the IS77.

STEP 3

Connect the amplifier turn on leads from each of the adapters together.