


Harley Davidson 1997 and older

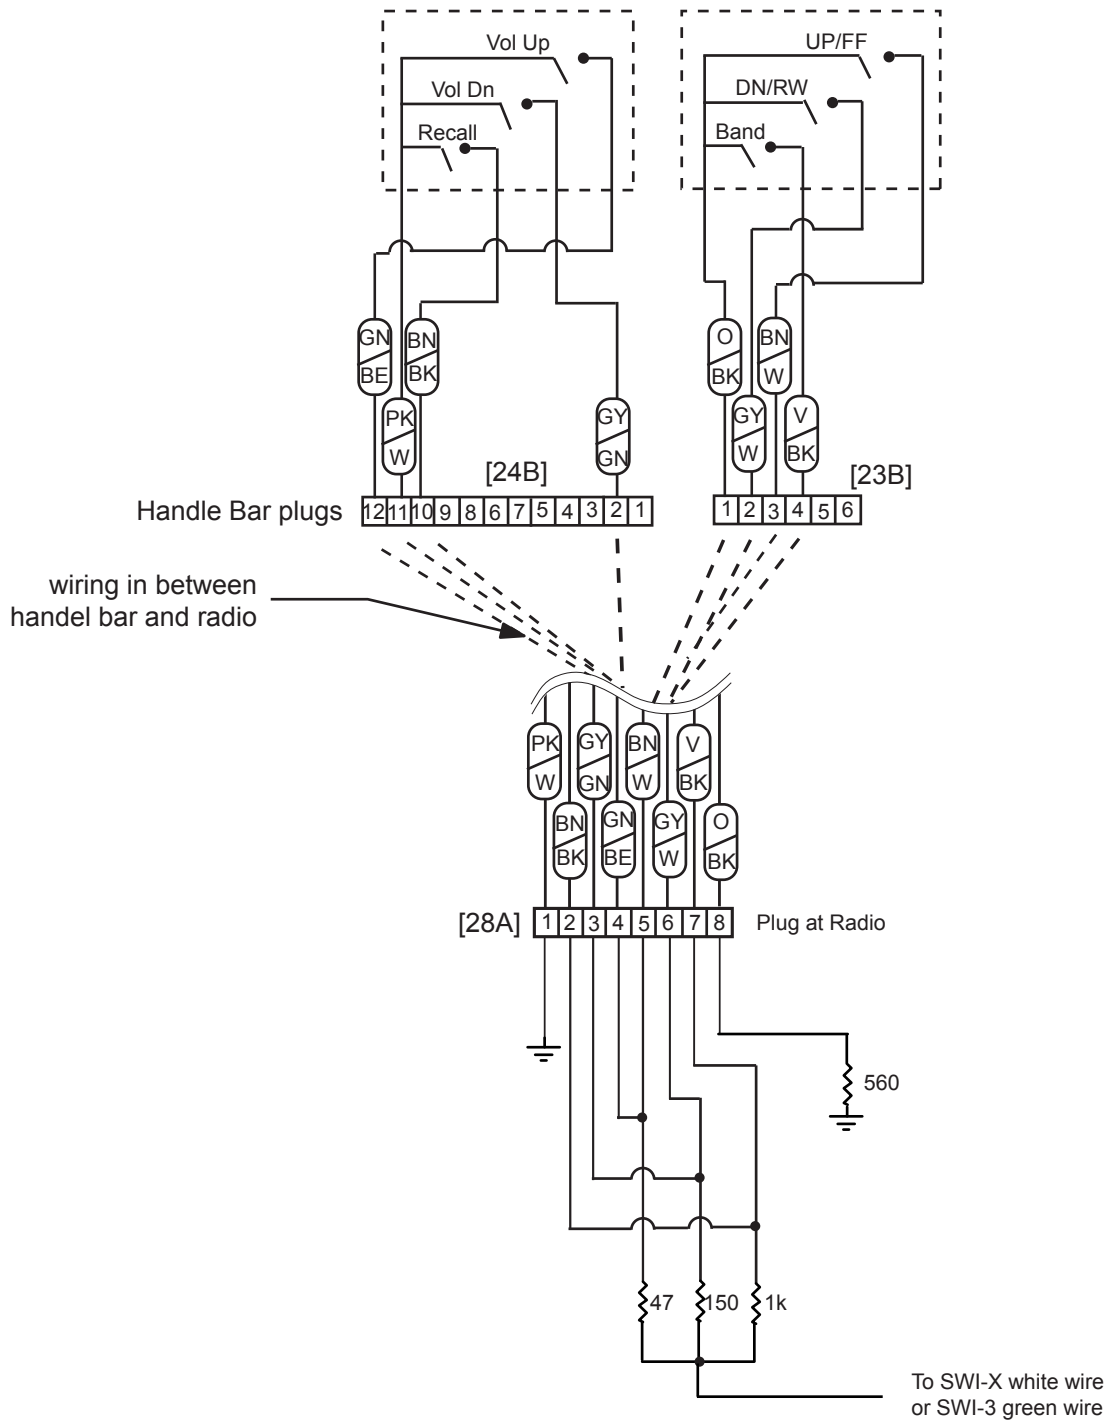

On the [28A] connector:

1. Connect PK/W wire - pin #1 to ground. Connect O/BK - pin #8 to ground with a 560 ohm resistor inline.
2. Splice BN/BK - pin #2 and V/BK - pin #7 together with a 1k ohm resistor inline. Splice GY/GN - pin #3 and GY/W - pin #6 together with a 150 ohm resistor inline. Splice GN/BE - pin #4 and BN/W - pin #5 together with a 47 resistor inline.
3. Connect all remaining ends of resistors together and connect to SWC input wire of interface.